



 BRADY®

# S3700

**Professional Grade.  
Premium Experience.**

Get enhanced capabilities for a flawless facility

**MULTICOLOUR + CUT SIGN AND LABEL PRINTER**

# Bold multicolour. Precision shape cutting.


# **SMOOTHER OPERATIONS**

Because safety and efficiency are the pulse of your operations, you need an industrial label printer that delivers both. Put multicolour brilliance, transformative shape cutting and seamless create-and-print capabilities at the heart of your labelling. Empower any user to make signs, labels and tags for just about any application. Let your labelling take shape with the BradyPrinter S3700 Multicolour & Cut Sign and Label Printer.



## **Mono or multicolour, delivered in seconds**

Easily print the colours you need. Smarter print technology enables simple 20-second changeovers of ribbons and labels for safety identification, Lean visuals, work-in-process labels and more that pop — quickly, reliably.



## **Flawless shapes, letters, arrows and more**

Transform the way you label with straighter lines, smoother curves and tighter connection points thanks to the precision XY plotter cutter. Plus, stack pipe markers and pack multiple shapes per label to minimise waste.



## **Extra-easy create and print**

Now everyone can work how and where they work best with time-saving onboard templates, intuitive PC labelling software and a mobile app.





 **BRADY.**

BradyPrinter S3700



▶ Learn more at [BradyID.com.au/S3700](https://BradyID.com.au/S3700)  
or scan to watch the overview video



# BETTER STARTS WITH BRADY

The performance you need. From the name you trust.

## KEY FEATURES



### Precise shape cutting

- ▶ Straighter lines
- ▶ Rounder circles
- ▶ Tighter connection points
- ▶ Pipe markers can be stacked and multiple shapes packed closer together



### Durable multicolour made easy

- ▶ Easy-change, drop-lock print ribbons and labels
- ▶ No-change multicolour print ribbons
- ▶ Compliance-driving safety colours
- ▶ Impactful labels durable up to 10 years



### Automatic label setup

- ▶ No calibrating, no threading
- ▶ Printer auto-IDs material, sets accurate burn settings and speed
- ▶ 20-second material changeovers
- ▶ Print ribbon lasts up to 60% longer thanks to auto adjustments



### Blazing-fast print speed – up to 5 in. (127mm) per second!

- ▶ Any size job delivered fast
- ▶ Streamlines print queues and minimises bottlenecks



### Works how you work best

- ▶ Enables any user to create almost any label or sign
- ▶ Multiple ways to create and connect: onboard, PC or app
- ▶ PC labelling software for next-level label creation
- ▶ Wi-Fi and Bluetooth ready
- ▶ Mobile app for assessing needs and creating labels on the move



### Walk-up-and-print convenience

- ▶ Time-saving onboard templates
- ▶ No design expertise needed
- ▶ Right labels, right when you need them

# S3700 | MULTICOLOUR + CUT SIGN AND LABEL PRINTER

# POWERFUL, PRECISE PRODUCTION

With the ability to print in multicolour on a wide variety of material types and sizes, plus cut shapes, letters and more, this printing system will leave you wanting for nothing — except maybe more labelling jobs.

## Easy-access latch

Allows immediate access to all serviceable internal parts

## Auto cutter

Cuts off material after a job, after a label or not at all

## Installed parts display

Provides a quick snapshot of what's in, and what's not







**Integrated label library**

Onboard label templates and 600 pre-programmed barcodes and symbols

**Multiple ways to connect**

Wi-Fi and Bluetooth enabled, two USB ports and ethernet ready

**User-friendly tilt display**

Full-colour, 6-in. (152.4mm) touchscreen and fast processor

**Onboard input**

Full-size QWERTY keyboard folds out of the printer body

# SERIOUS PRODUCTIVITY fueled by Brady technology

Manage the demands of your day with a printer that takes on the tough work. Take a look under the hood at the automating, time-saving, headache-eliminating features all designed to make every print job flawless, faster.

## Media wiper

Ensures clean finished labels and catches dust so your printer runs stronger

## Media guides and integrated sensors


Sensors automatically align when guides squeeze together — no trial-and-error adjustments

## Precise XY plotter cutter

Smoother curves, tighter connection points, straighter lines and more shapes per label





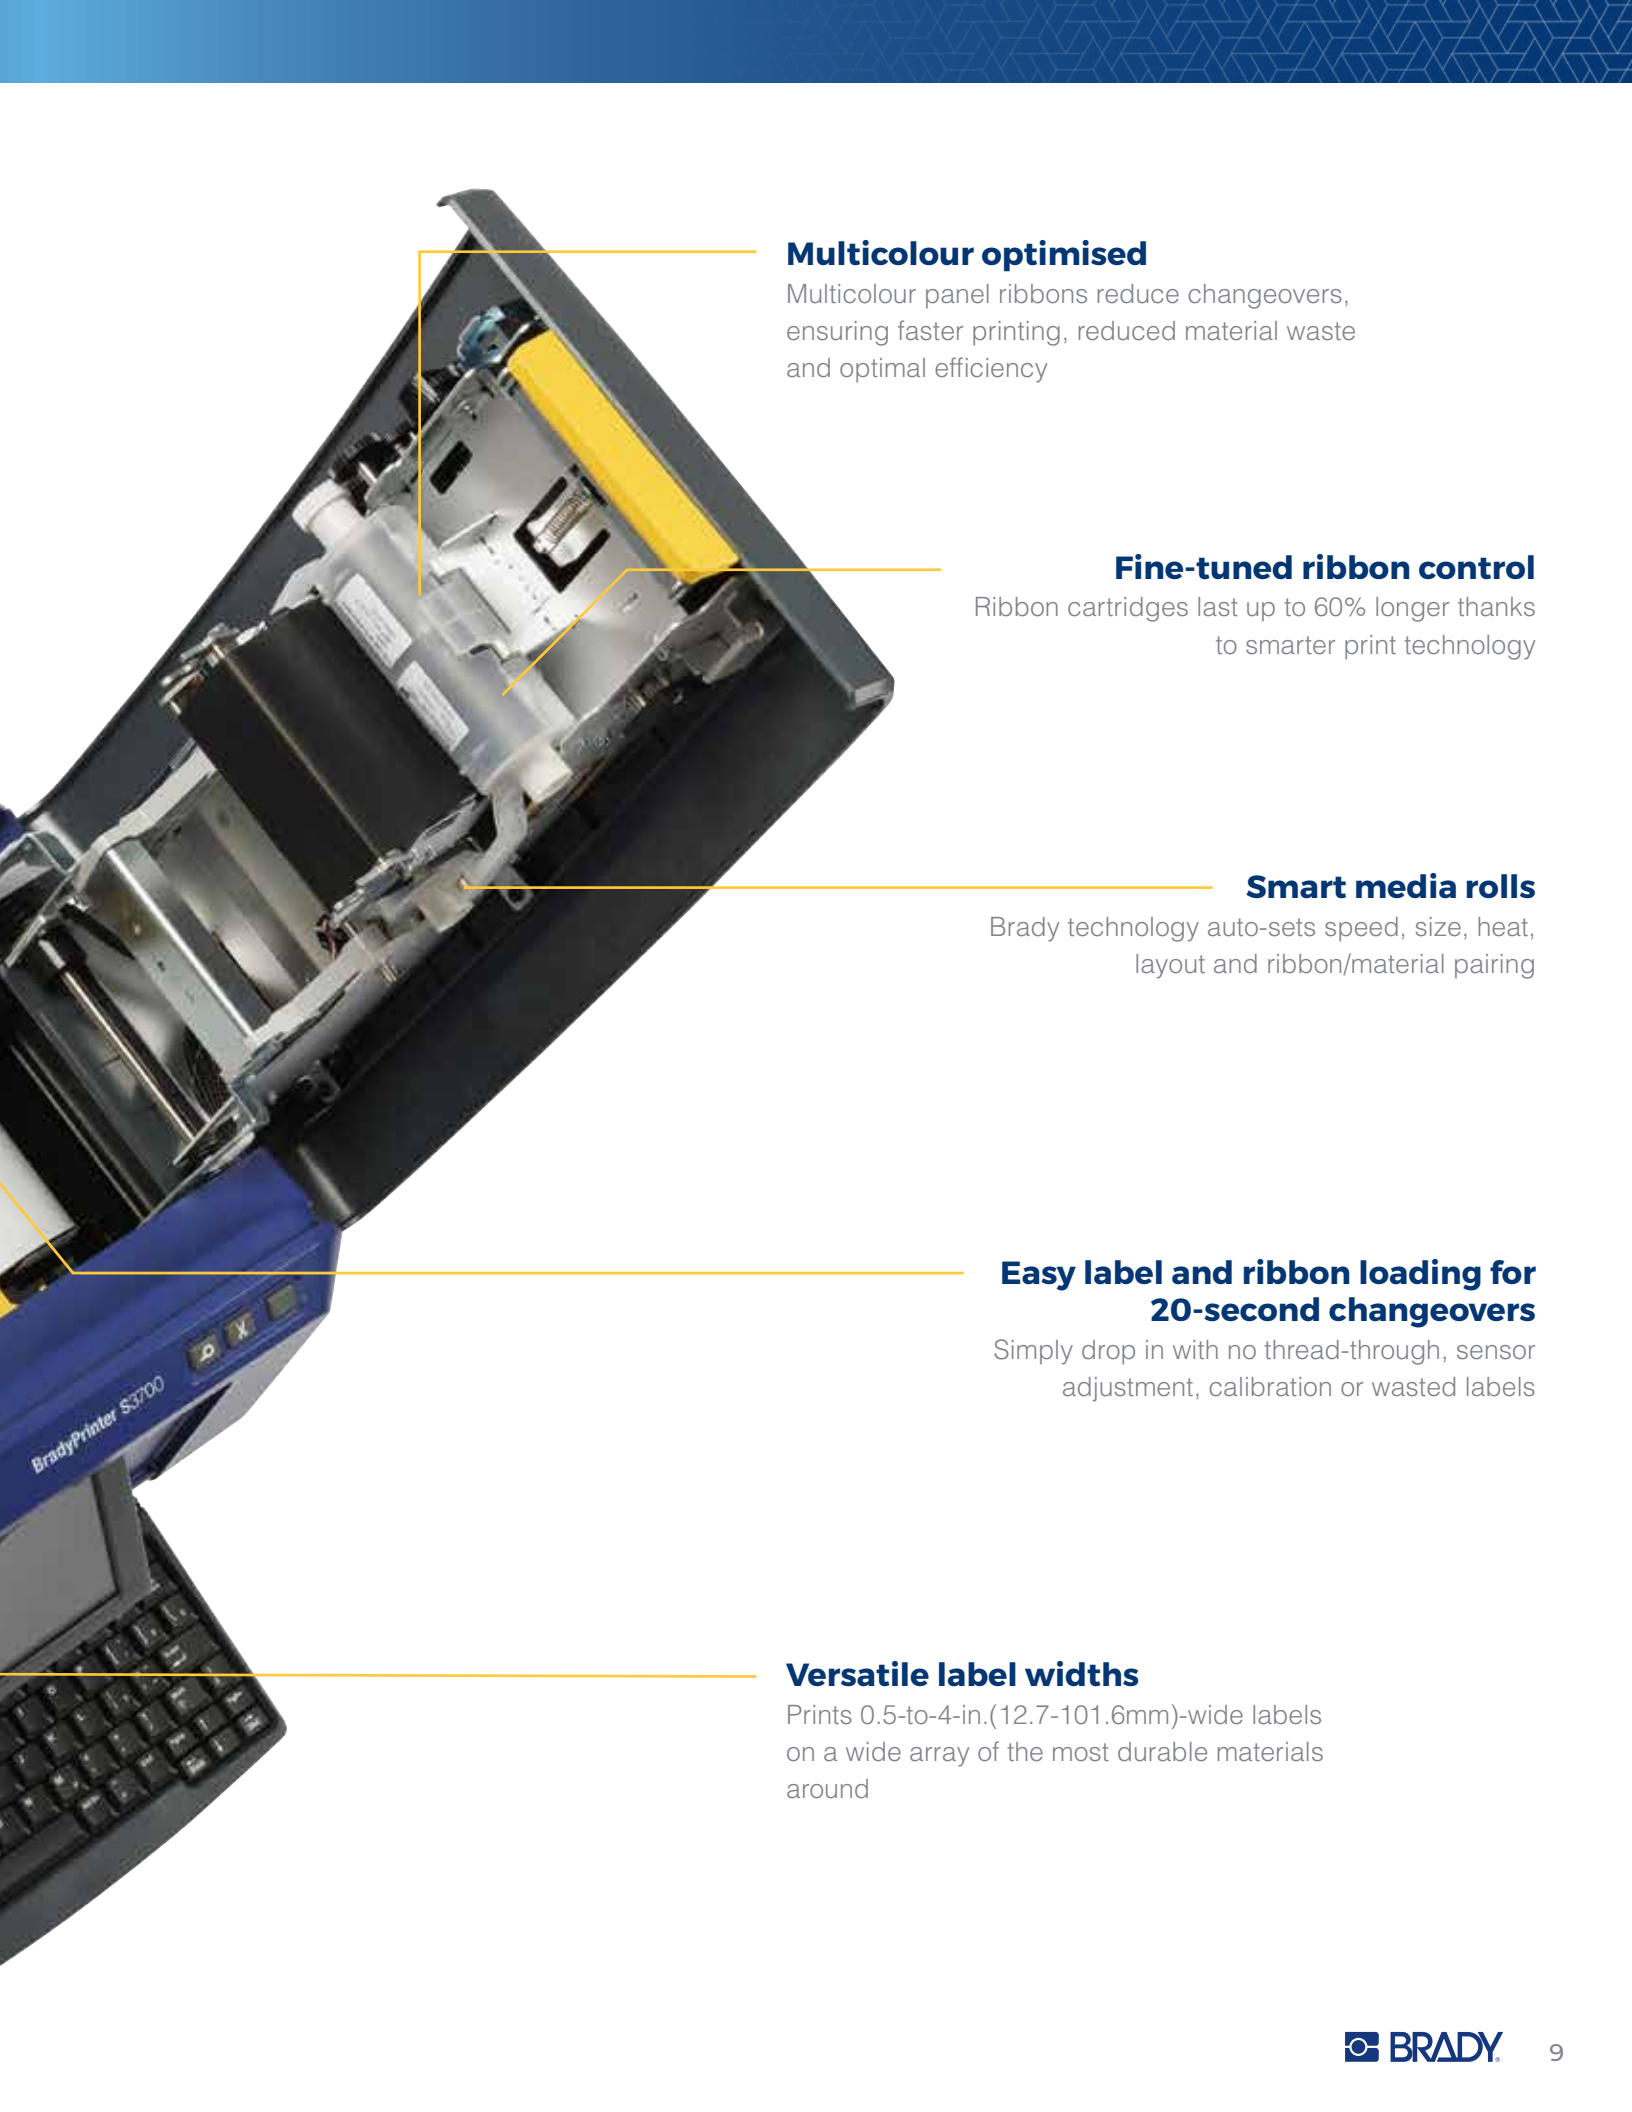

### **Multicolour optimised**

Multicolour panel ribbons reduce changeovers, ensuring faster printing, reduced material waste and optimal efficiency

### **Fine-tuned ribbon control**

Ribbon cartridges last up to 60% longer thanks to smarter print technology

### **Smart media rolls**

Brady technology auto-sets speed, size, heat, layout and ribbon/material pairing

### **Easy label and ribbon loading for 20-second changeovers**

Simply drop in with no thread-through, sensor adjustment, calibration or wasted labels

### **Versatile label widths**

Prints 0.5-to-4-in.(12.7-101.6mm)-wide labels on a wide array of the most durable materials around

# THE RIGHT TECHNOLOGY from the right partner

The S3700 printer, now with cutting-edge Brady print technology

Get advanced print performance with time-saving, cost-reducing technology built into every S3700. Designed as a system (printer, ribbon, materials), each part “talks” to the other and enables many automatic functions. Auto setup and part recognition save you time, and auto adjustments help **ribbon cartridges last up to 60% longer**.



## Faster setup

Set up your S3700 in seconds. Just drop in your ribbon and label roll. The printer recognises built-in smart cell chips, allowing for fast setup.



## Easier printing


Loaded with time-saving features, label templates and an intuitive interface, the S3700 offers easy operation for any application.



## Less waste

Thanks to auto calibration and setup, the S3700 prints on the very first label. That eliminates frustrating trial and error, and expensive waste.



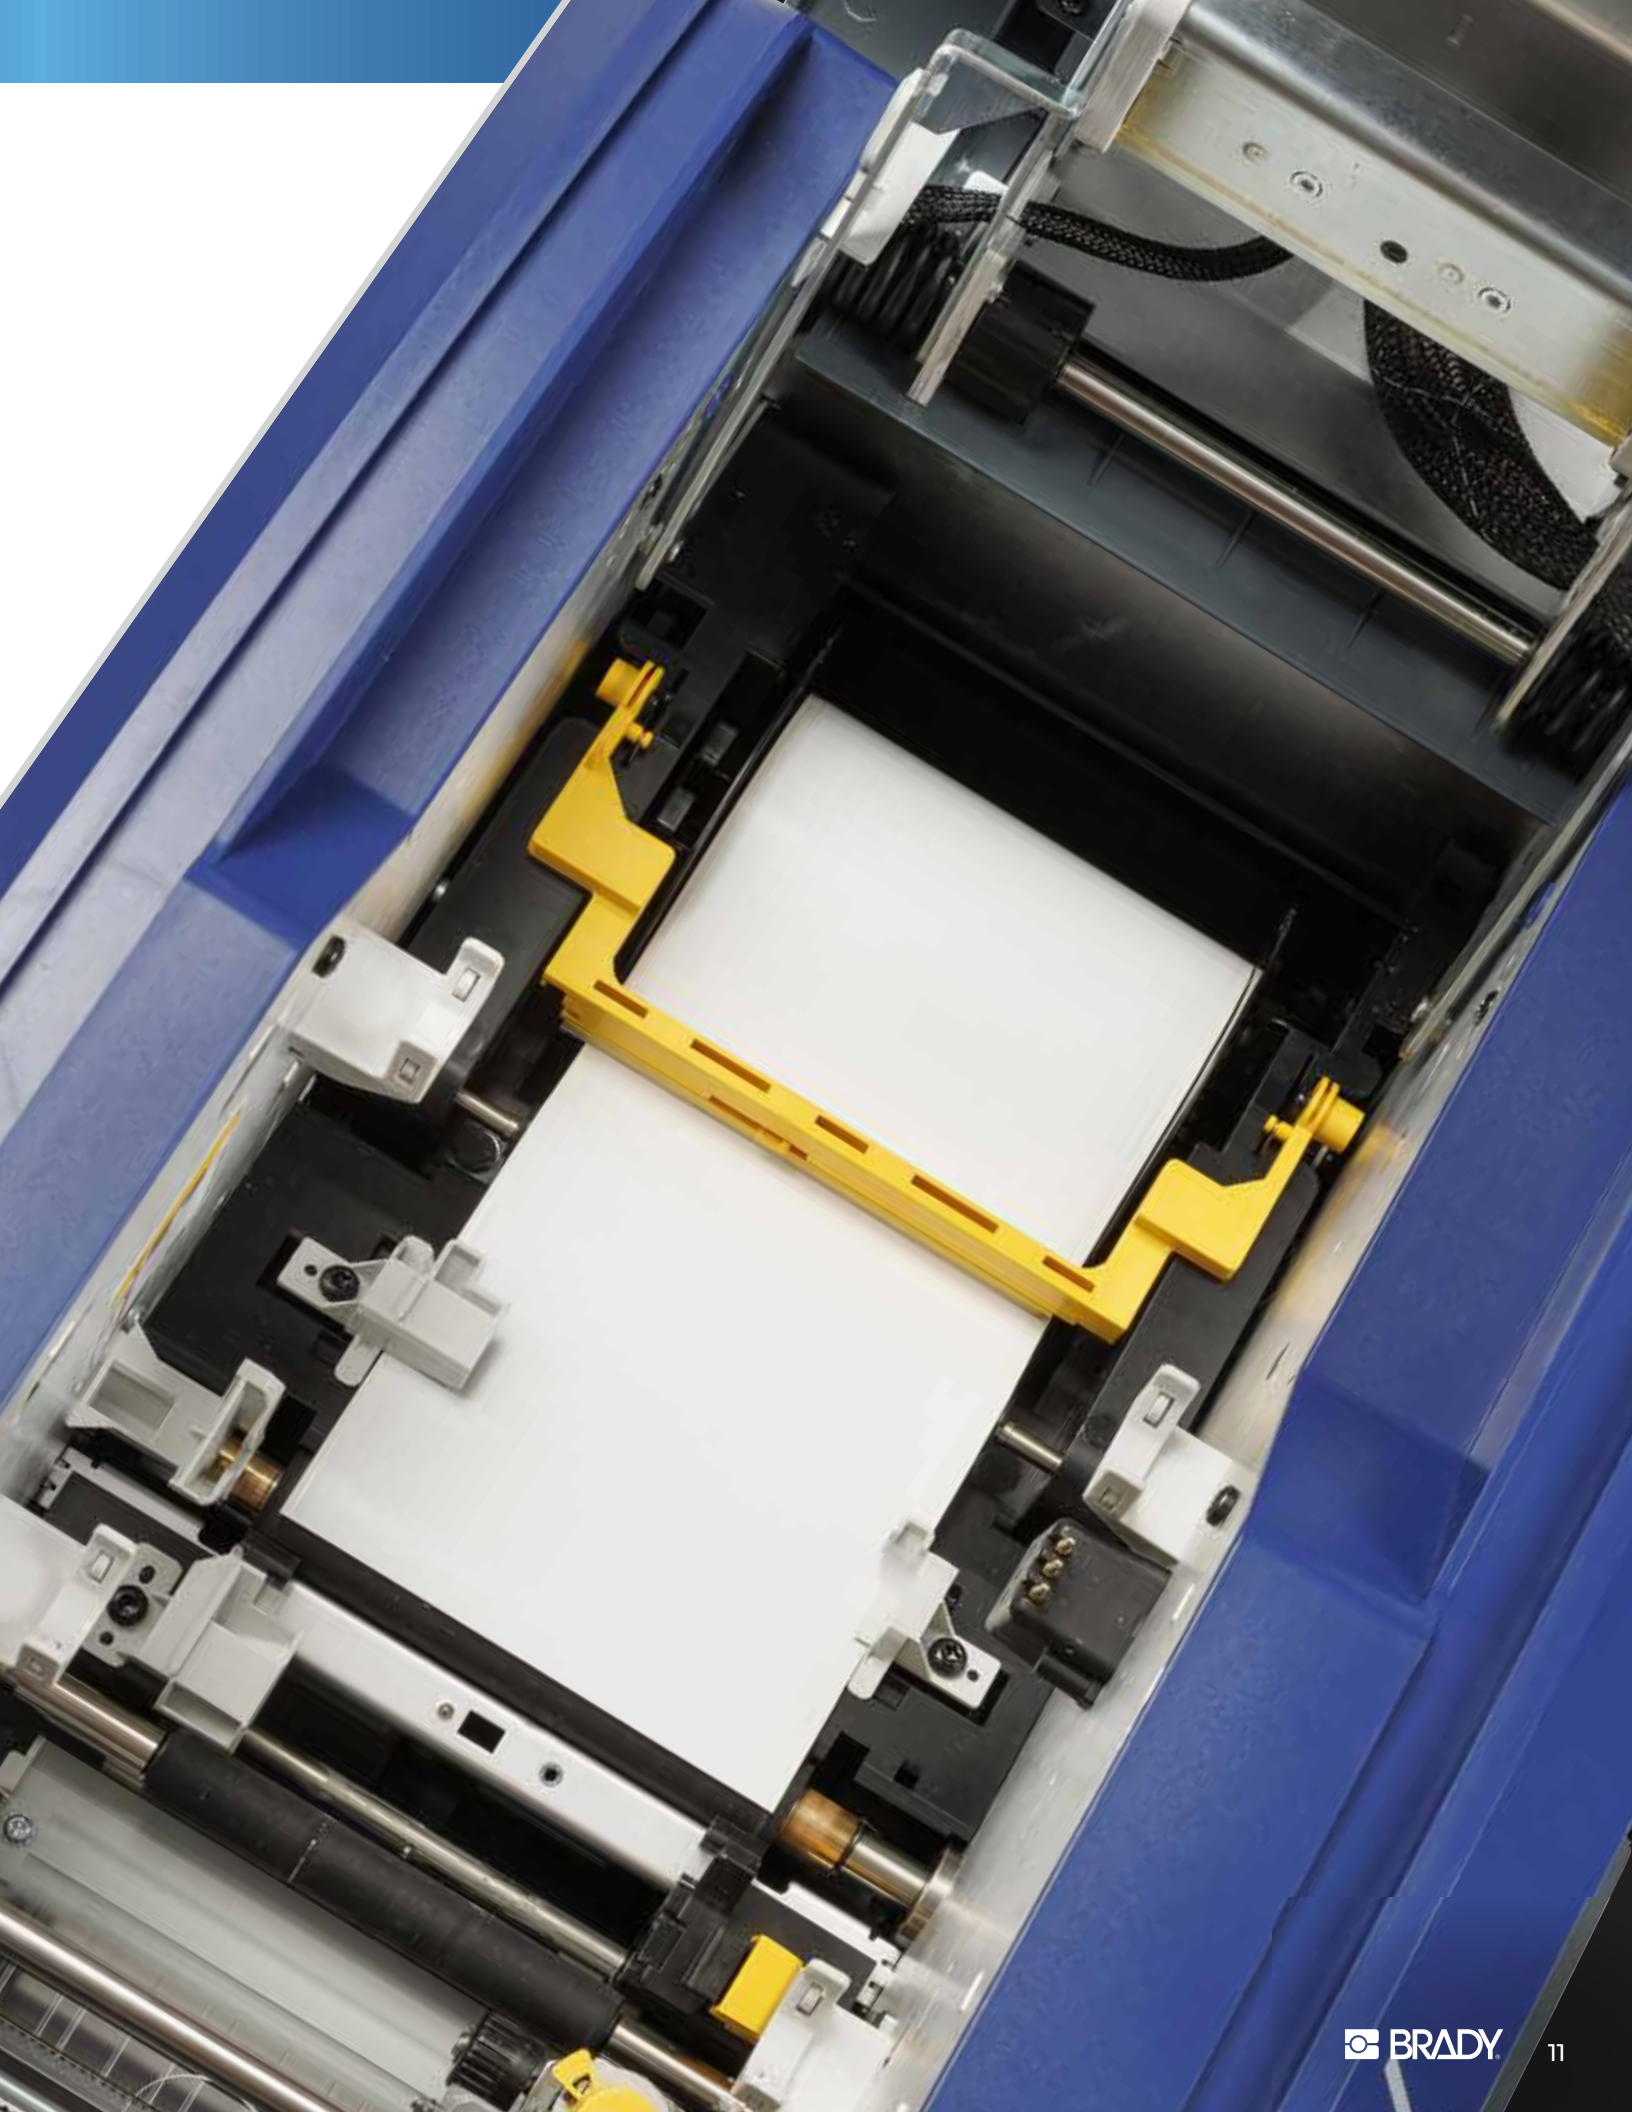



# PROFESSIONAL GRADE Premium Experience

Faster speeds. More options. Smoother operations.



## S3700 Multicolour & Cut Sign and Label Printer

### The S3700 offers a number of time- and cost-saving benefits:

- ▶ Quickly change over materials in under 20 seconds
- ▶ Print on the first label – no calibration required
- ▶ Built-in XY cutter slices shapes and letters flawlessly
- ▶ Multicolour optimised for more impactful labels, signs and tags
- ▶ Prints on a wide variety of labels up to 4-in. (101.6mm) wide



The S3700 easily integrates with your existing systems and platforms — but only Brady Workstation Label Creation and Management Software truly maximises the full potential of your printing experience.

Part #	Description
176847	S3700 Multicolour & Cut Sign and Label Printer
176848	S3700 Multicolour & Cut Sign and Label Printer with Bluetooth & Wifi

### Accessories

Part #	Description
108365	Travel Soft Case
33969	Cleaning Kit 6 Pk
149565	Stylus
80925	USB Cable
142114	Media Wipers 5 Pk
146176	Cutter Blade
76737	Transfer Tape

**S3700 printers accept the B30 series version V2 media.**

Printer ships with Brady Workstation Label creation software, power and USB cords, cleaning kit, QuickStart Guide and USB user manual, Windows driver and how-to videos.



## Simple. Durable. Reliable.

Single colour printing for durability, clarity and consistency

### S3100 Sign and Label Printer

No need for shapes or multicolour? Try the S3100, with a user-friendly touch-screen interface for standalone use. Consistently get the job done right every time with this reliable printer. Simply walk up. Print. Done.

# PRINT RIBBONS

More options. Bigger impact. Extremely durable.



## Multicolour panel ribbons

Choose from 2- and 4-colour ribbons to simplify and reduce changeovers. Print more in multicolour for more impactful identification, less hassle and minimal waste.





## Rapid ribbon changes

Get 5-second ribbon supply changes with drop-and-click technology. No calibrating, no threading and no waste. Each tough, smear-proof ribbon withstands years of industrial use.



## 5-second ribbon installation

- ▶ Tough, smear-proof ribbons produce long-lasting printed text and can withstand years in industrial areas and outdoor conditions
- ▶ Self-contained cartridges drop straight into printer with a “click”
- ▶ No calibrating, no threading, no wasted feeding, no hassles and the ink will always be facing the right direction
- ▶ Printer notifies user if installed ribbon is not recommended for installed labels

## Single-Colour Print Ribbons

- Solid colour ribbons for printing a single colour onto a label
- Can be swapped out for printing multicolour labels on the printer if a multicolour panel ribbon is not on hand



Part #	Catalog #	Colour	Size Inch (mm)	Length Feet (m)	Part #	Catalog #	Colour	Size Inch (mm)	Length Feet (m)
118084	B30-R10000	Black	4.330 (109.9)	200 (60.9)	118089	B30-R10000-RD	Red	4.330 (109.9)	200 (60.9)
118093	B30-R6000	Black	4.330 (109.9)	200 (60.9)	118086	B30-R10000-GN	Green	4.330 (109.9)	200 (60.9)
143119	B30-R6200	Black	4.330 (109.9)	200 (60.9)	118085	B30-R10000-BL	Blue	4.330 (109.9)	200 (60.9)
118096	B30-R6400	Black	4.330 (109.9)	200 (60.9)	118091	B30-R10000-YL	Yellow**	4.330 (109.9)	200 (60.9)
118094	B30-R4300	Black	4.330 (109.9)	200 (60.9)	118088	B30-R10000-OR	Orange	4.330 (109.9)	200 (60.9)
149263	B30-R4900	Black	4.330 v109.9)	200 (60.9)	140856	B30-R10000-PRCCY	Process Cyan***	4.330 (109.9)	200 (60.9)
118090	B30-R10000-WT	White	4.330 (109.9)	200 (60.9)	140854	B30-R10000-PRCYEL	Process Yellow***	4.330 (109.9)	200 (60.9)

\*\* B30-R10000-YL for printing yellow onto white. B30-R10000-YL2 for printing yellow onto other colours of B-595.

\*\*\* Process ribbons print a much lighter shade — designed to be used together with other process ribbons and black ribbon to lay down a dot pattern for printing "blended" colours and process colour objects with the printer.

## Multicolour Panel Print Ribbons

- Ribbons have panels of 2 or 4 different colours for printing multiple colours onto a label
- Use CMYK ribbon for printing blended colours. Blended colours are not as saturated as solid or spot colour panel ribbons, but do offer a broader palette of available colours and shades
- Print multiple colours without having to swap in multiple ribbons



## Two-Colour Print Ribbons

Part #	Catalog #	Colour	Size Inch (mm) x Inch (mm)	Length Feet (m)
<b>8-in. (203.2mm) panel length — Typical yield: 100 panel sets per roll</b>				
140850	B30-R10000-KR-8	Black and Red	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
140848	B30-R10000-KB-8	Black and Blue	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
140847	B30-R10000-KO-8	Black and Orange	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
140846	B30-R10000-KG-8	Black and Green	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
<b>16-in. (406.4mm) panel length — Typical yield: 60 panel sets per roll</b>				
140864	B30-R10000-KR-16	Black and Red	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)
140852	B30-R10000-KB-16	Black and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)
140863	B30-R10000-KO-16	Black and Orange	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)
140851	B30-R10000-RB-16	Red and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)

## Four-Colour Print Ribbons

Part #	Catalog #	Colour	Size Inch (mm) x Inch (mm)	Length Feet (m)
<b>8-in. (203.2mm) panel length — Typical yield: 50 panel sets per roll</b>				
140860	B30-R10000-KRYG-8	Black, Red, Yellow and Green	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
140866	B30-R10000-KRYB-8	Black, Red, Yellow and Blue	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
140865	B30-R10000-KRBO-8	Black, Red, Blue and Orange	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
<b>16-in. (406.4mm) panel length — Typical yield: 30 panel sets per roll</b>				
140859	B30-R10000-KRYB-16	Black, Red, Yellow and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)

† Process ribbons print a much lighter shade — designed to be used together with other process ribbons and black ribbon to lay down a dot pattern for printing "blended" colours and process colour objects.

## Print Ribbon & Label Material Compatibility

To ensure the best legend permanence, all ribbons have been developed to meet the requirements of the materials to be printed on. Use the guide below to determine which ribbon series is recommended with your print materials.

●	Recommended ribbon for use with respective material.
▲	Acceptable ribbon for use with respective material.
UL	Materials are UL recognised with its respective ribbon.
CSA	Materials are CSA approved with its respective ribbon.

B-# material		E30-R4300	E30-R4900	E30-R6000	E30-R6200	E30-R6400	E30-R10000	E30-R4400-WT	E30-R10000-WT	E30-R10000-YL**	E30-R10000-YL2**	E30-R10000***
B-423	Polyester	-	-	● UL / CSA	▲	-	●	-	-	-	-	-
B-424	Paper	●	-	-	-	-	-	-	-	-	-	-
B-428	Metallised Polyester	● UL / CSA	-	-	-	-	-	-	-	-	-	-
B-432	Clear Polyester	-	▲ UL	● UL / CSA	-	-	-	▲	-	-	-	-
B-434A	Metallised Polyester	-	-	● UL / CSA	-	-	-	-	-	-	-	-
B-437	Polyvinylfluoride	●	-	-	-	-	-	-	-	-	-	-
B-437 YEL	Polyvinylfluoride	●	-	-	-	-	-	-	-	-	-	-
B-438	Metallised Polyester	● UL / CSA	-	-	-	-	●	-	-	-	-	-
B-443	Polyester	-	-	-	-	● UL / CSA	-	-	-	-	-	-
B-480	Polyester Rubber-Based Adhesive	-	-	●	-	-	-	●	-	-	-	-
B-483	Polyester	-	-	● UL / CSA	-	-	●	-	-	-	-	●
B-483A	ToughStripe® Polyester	-	-	●	-	-	●	●	-	-	-	●
B-484A	Polyester	-	-	● UL	-	-	-	-	-	-	-	-
B-486B	Metallised Polyester	● UL / CSA	-	-	-	-	-	-	-	-	-	-
B-488	Matte White Polyester	●	-	-	-	-	-	-	-	-	-	-
B-489A	Polyester	● UL / CSA	-	-	-	-	-	-	-	-	-	-
B-498	Repos Cloth	▲ UL	-	-	● UL	-	-	-	-	-	-	-
B-509	Printable Magnetic	-	-	●	-	-	●	-	-	-	-	●
B-526	Photoluminescent Polyester	-	-	●	-	-	●	-	-	-	-	●
B-549	Polyester	-	-	●	-	-	●	-	-	-	-	●
B-551	Non-Adhesive Tag	-	-	-	-	-	●	-	-	-	-	●
B-565	Metallised Polyester	-	-	-	-	-	●	-	-	-	-	-
B-569	Polyester	-	-	●	-	-	●	-	●	-	-	●
B-581	Repos Vinyl	-	-	●	-	-	●	-	-	-	-	●
B-584	Reflective	-	-	●	-	-	●	-	-	-	-	●
B-593	Polyester	-	-	●	-	-	-	●	-	-	-	-
B-595	Outdoor Vinyl	-	-	●	-	-	●	-	●	-	●	●
B-724	Polyimide	●	-	-	-	-	-	-	-	-	-	-
B-727	Polyimide	-	-	● UL	-	-	-	-	-	-	-	-
B-787	Glossy White Polyvinyl Fluoride	-	-	●	-	-	-	-	-	-	-	-
B-851	Non-Adhesive Tag	-	-	-	-	-	●	-	-	-	-	●
B-854	ToughWash® Metal Detectable	-	-	●	-	-	●	-	-	-	-	●
B-855	ToughWash	-	-	●	-	-	-	-	-	-	-	-
B-7569	Vinyl Film	-	-	●	-	-	●	-	-	-	-	-

\*\* B30-R10000-YL for printing yellow onto white. B30-R10000-YL2 for printing yellow onto other colours of B-595.

\*\*\* Coloured ribbons optimised for use on white material. Test use on other material colours for suitability to your application.



# Making the **IMPOSSIBLE POSSIBLE**

An engine compartment label that won't burn. A food and beverage label that resists harsh washdowns and chemical sanitisers. A sign that lives in the elements for a decade and is still legible.

Every day, our scientists are tasked with making impossible situations possible, which is why we invest so heavily in research and development. Brady's patent portfolio is a direct reflection of our dedication to use science to solve for everything — from lubricants to solvents, freezing cold to blistering heat, and anything else your workplace can come up with.

















**You may have 1,000 problems, but finding the right Brady material isn't one of them.**



# Materials for every application

Successful projects start (and end) with Brady materials. Optimum performance and durability are assured with each.

			Colour	Permanent	Removable	Matte	Gloss	Service Temperature	Page #
<b>B-423</b>	Multi-Purpose Polyester	Polyester with a high-gloss finish and a permanent acrylic adhesive. Excellent image quality and widely used for barcoding, asset tracking, product labels and post-process PCB electronic component labelling. Adheres best to flat surfaces. UL-rated for surfaces commonly used in solar panel manufacturing.	○	•			•	-94° to 248°F (-70° to 120°C)	24
<b>B-424</b>	Paper	Bright white paper label with a permanent latex adhesive. Excellent barcode read rates. Ideal for labelling applications requiring a low-cost, general-purpose labelling material.	○	•		•		-40° to 122°F (-40° to 50°C)	34
<b>B-428</b>	Metallised Matte Polyester	Matte metallised polyester with a permanent adhesive. Light gray, matte appearance. Adheres best to flat surfaces. Ideal for rating plates on products and panels, and general-purpose product labels.	●	•		•		-40° to 293°F (-40° to 145°C)	30
<b>B-432</b>	High Adhesion Multi-Purpose Clear Polyester	Clear polyester with a high-gloss finish and a stronger, 2-mil permanent acrylic adhesive. It has excellent imaging quality and is designed for flat surfaces that are textured or require increased adhesion.	⊙	•			•	-40° to 212°F (-40° to 100°C)	26
<b>B-434</b>	Metallised High Adhesion Polyester	Glossy metallised polyester with a stronger, 2-mil permanent adhesive. It has a high-gloss, silver appearance with excellent image quality. Adhesive is designed for flat surfaces that are textured or require increased adhesion. Ideal for rating plates, general-purpose product labels and asset tracking labels.	●	•			•	-40° to 194°F (-40° to 90°C)	31, 40
<b>B-437</b>	Self-Extinguishing Tedlar®	Heavy-duty Tedlar® label material with self-extinguishing features for wire and cable wrapping. It has excellent resistance to water, oil, chemicals and abrasion.	○●	•			•	-94° to 275°F (-70° to 135°C)	47
<b>B-438</b>	Checkerboard Pattern Tamper Evident Matte Metallised Polyester	Tamper-indicating, metallised polyester label that leaves an aggressive checkerboard adhesive pattern on the surface if label is removed. It has a matte, silver appearance with has excellent imaging quality for text, barcodes and symbols. It is designed for rating and serial plates, asset tracking labels and product ID such as warranty labels when anti-tampering and tamper-indicating features are desired.	●	•			•	-40° to 104°F (-40° to 40°C)	32
<b>B-443</b>	Ultra Aggressive Adhesive High Temp and Chemical Resistant Polyester Labels	Very durable matte polyester with excellent high-temp resistance and superior resistance to fluids and chemicals that are not high in pH value. Short term temp resistance to 410° F. Features a hybrid acrylic-rubber-based permanent adhesive and is self-extinguishing.	○	•			•	-94° to 248° F (-70° to 120°C)	29
<b>B-480</b>	Ultra High Adhesion Matte Faux Metallised Polyester Labels	Thermal transfer polyester material with a metallic-looking finish and an aggressive adhesive.	●	•				-94° to 248° F (-70° to 120°C)	
<b>B-483A</b>	Ultra High Adhesion Multi-Purpose Polyester	Polyester with high-gloss finish and ultra-aggressive, permanent acrylic adhesive. Designed for very high adhesion to flat but highly textured or powder-coated surfaces and low-surface-energy surfaces. Gloss version of B-489.	○	•			•	-40° to 248°F (-40° to 120°C)	27, 40, 41, 45 65
<b>B-484</b>	Flexible High Adhesion Multi-Purpose Polyester	Polyester with a glossy finish and a stronger, permanent acrylic adhesive. Similar to B-483, but with a thinner construction to facilitate high adhesion to flat, curved or angular surfaces, and surfaces that are textured, powder coated or low-surface energy.	○	•			•	-40° to 248°F (-40° to 120°C)	26, 40, 41
<b>B-486</b>	Ultra High Adhesion Metallised Matte Polyester	Matte metallised polyester with an ultra-aggressive, permanent adhesive. It has a light gray, matte appearance. Designed for very high adhesion to flat but highly textured or powder-coated surfaces and low-surface-energy surfaces. Ideal for panel rating plates, product labels and asset-tracking labels.	●	•			•	-40° to 248°F (-40° to 120°C)	31, 40
<b>B-488</b>	Solvent Resistant Polyester Labels	High Performance Polyester withstands numerous solvents and variable temperatures when applied to various surfaces including Stainless Steel and Polypropylene.	○	•			•	-40° to -320°F (-40° to 160°C)	
<b>B-489</b>	Ultra High Adhesion Multi-Purpose Matte Polyester	Matte polyester with an ultra-aggressive, permanent adhesive. It is designed for very high adhesion to flat but highly textured or powder-coated surfaces and low-surface-energy surfaces. Matte version of B-483.	○	•			•	-94° to 248°F (-70° to 120°C)	27
<b>B-498</b>	Repositionable Multi-Purpose Vinyl Cloth	Vinyl cloth with an aggressive and repositionable adhesive for wire and cable wraps and general-purpose labelling applications. Label adheres with excellent holding power, yet can be easily and cleanly removed and repositioned.	○		•		•	-40° to 175°F (-40° to 79°C)	41, 46, 64
<b>B-509</b>	Magnetic Polyester (repositionable)	A thick, non-adhesive magnetic material with a printable vinyl topcoat. The easiest and quickest material for repositioning and reusing labels.	○●		•		•	-0° to 158°F (-17° to 70°C)	62

			Colour	Permanent	Removable	Matte	Gloss	Service Temperature	Page #
<b>B-526</b>	BradyGlo™ High Intensity Glow-in-the-Dark Polyester	Printable BradyGlo™ photoluminescent polyester tape is for glow-in-the-dark identification for up to 10 hours. Ideal for marking emergency shut-offs and controls markings, supplemental evacuation labels and marking emergency equipment.		•			•	-40° to 140°F (-40° to 60°C)	61
<b>B-549</b>	Cold Temperature Application Multi-Purpose Polyester	Cold-temperature polyester material permanently adheres to frozen surfaces. Can be applied in temperatures as low as -10°F, and stays adhered in -40°F temperatures.		•			•	-40° to 212°F (-40° to 100°C)	62
<b>B-551</b>	Heavy Duty Non-adhesive Tag Stock	A durable, non-adhesive plastic tag material. Ideal for safety and general-purpose industrial hang-tags, as well as lockout tagout applications. Meets OSHA 50 lb. pull test.		n/a	n/a		•	-40° to 193°F (-40° to 89°C)	56
<b>B-565</b>	Metallised Polyester Labels	Metallised polyester film with a permanent acrylic pressure sensitive adhesive and a topcoat specifically formulated for thermal transfer printing.		•			•	-40° to 230°F (-40° to 110°C)	
<b>B-569</b>	Low-Halide Multi-Purpose Polyester	Low-halide polyester label material with a permanent adhesive. It is designed for stainless steel pipes and stainless steel surfaces, and is best suited for smooth, clean, flat surfaces.		•			•	-40° to 212°F (-40° to 100°C)	59, 63
<b>B-581</b>	Repositionable Multi-Purpose Vinyl	Durable vinyl label with repositionable adhesive.				•	•	-40° to 180°F (-40° to 82°C)	62
<b>B-584</b>	All-Weather Reflective	Printable retroreflective tape. This is highly reflective material that shines back brightly when struck by light. Ideal for low-light and inclement-weather viewing applications.		•			•	-40° to 158°F (-40° to 70°C)	61
<b>B-593</b>	Raised Profile Foam-backed Polyester	High-gloss polyester label with a thick, raised profile and an ultra-aggressive permanent adhesive. Designed as a high-performance low-cost alternative to engraved plates and push-button labels on panels and enclosures. Ideal for labelling small components inside panels.		•			•	-4° to 212°F (-20° to 100°C)	38, 39, 41
<b>B-595</b>	All Weather Vinyl	Indoor- and outdoor-grade vinyl with a permanent adhesive in a wide range of colours. Durable, pliable and highly conforming to rough and irregular surfaces.		•			•	-40° to 180°F (-40° to 82°C)	57, 58, 64, 69
<b>B-724</b>	Ultra High Temp Matte Amber Polyimide	Extreme, high-temperature polyimide film with a permanent acrylic adhesive. It is designed to withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards. Can be used for top- or bottom-side component or board identification. Withstands extremely high temperatures.		•			•	-94° to 626°F (-70° to 330°C) check TDS for temp duration details	37
<b>B-727</b>	High Temp Polyimide	Glossy polyimide film with a permanent acrylic adhesive. It is designed to withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards. Can be used for top- or bottom-side component or board identification. Glossy topcoat provides excellent contrast and smear resistance.		•			•	-94° to 572°F (-70° to 300°C) check TDS for temp duration detail	35
<b>B-787</b>	Polyvinylfluoride Tape	Polyvinylfluoride tape is ideal for label applications where self-extinguishing properties are required.		•			•	-94° to -212°F (-70° to 100°C)	
<b>B-7569</b>	General Purpose Vinyl	Durable vinyl label with permanent adhesive.		•			•	-4° to 167°F (-20° to 75°C)	63, 69
<b>B-851</b>	Heavy Duty Non-adhesive Tag Stock	A durable, non-adhesive plastic tag material. Ideal for safety and general-purpose industrial hang-tags, as well as lockout tagout applications. Meets OSHA 50 lb. (22.68kg) pull test.		n/a	n/a		•	-40° to 193°F (-40° to 89°C)	56
<b>B-854</b>	ToughWash® Metal Detectable Washdown Resistant Polyester	Metal-detectable ToughWash® washdown-resistant label with a permanent adhesive. This material features a metal-detectable layer to allow detection in the food stream. Withstands numerous cycles of harsh chemicals, heat and heavy moisture.		•			•	-40° to 230°F (-40° to 110°C)	60
<b>B-855</b>	ToughWash® Washdown Resistant Polyester	ToughWash® washdown-resistant label with a permanent adhesive. Withstands numerous cycles of harsh chemicals, heat and heavy moisture. Abrasion, fuel, oil, chemical, high- and low-temperature resistant.		•			•	-40° to 230°F (-40° to 110°C)	60



## All-Weather Vinyl (B-595)

- For general facility and safety identification
- Durable, low-shrink vinyl with our most aggressive adhesive
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces)
- Adheres to difficult low-surface energy items (PVC piping, blow-molded equipment cases, ABS plastics, recycled plastics)





Figure 3



Part #	For XY-Cutter	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
142031	-	Fig. 3	B30C-500-595-WT	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
142030	-	Fig. 3	B30C-1125-595-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
142029	-	Fig. 3	B30C-2250-595-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
142028	-	Fig. 3	B30C-3000-595-WT	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
142027	✂	Fig. 3	B30C-4000-595-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
142036	-	Fig. 3	B30C-500-595-YL	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
142035	-	Fig. 3	B30C-1125-595-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
142034	-	Fig. 3	B30C-2250-595-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
142033	-	Fig. 3	B30C-3000-595-YL	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
142032	✂	Fig. 3	B30C-4000-595-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
142026	-	Fig. 3	B30C-500-595-RD	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142025	-	Fig. 3	B30C-1125-595-RD	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142024	-	Fig. 3	B30C-2250-595-RD	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142023	✂	Fig. 3	B30C-4000-595-RD	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141994	-	Fig. 3	B30C-500-595-BL	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141993	-	Fig. 3	B30C-1125-595-BL	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141992	-	Fig. 3	B30C-2250-595-BL	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141991	✂	Fig. 3	B30C-4000-595-BL	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142010	-	Fig. 3	B30C-500-595-GN	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142009	-	Fig. 3	B30C-1125-595-GN	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142008	-	Fig. 3	B30C-2250-595-GN	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142007	✂	Fig. 3	B30C-4000-595-GN	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142018	-	Fig. 3	B30C-500-595-OR	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
142017	-	Fig. 3	B30C-1125-595-OR	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
142016	-	Fig. 3	B30C-2250-595-OR	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
142015	✂	Fig. 3	B30C-4000-595-OR	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
141990	-	Fig. 3	B30C-500-595-BK	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141989	-	Fig. 3	B30C-1125-595-BK	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141988	-	Fig. 3	B30C-2250-595-BK	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141987	✂	Fig. 3	B30C-4000-595-BK	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141998	-	Fig. 3	B30C-500-595-BR	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141997	-	Fig. 3	B30C-1125-595-BR	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141996	-	Fig. 3	B30C-2250-595-BR	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
141995	✂	Fig. 3	B30C-4000-595-BR	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142006	-	Fig. 3	B30C-500-595-GD	Gold	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
142005	-	Fig. 3	B30C-1125-595-GD	Gold	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
142004	-	Fig. 3	B30C-2250-595-GD	Gold	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
142003	✂	Fig. 3	B30C-4000-595-GD	Gold	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
142014	-	Fig. 3	B30C-500-595-GY	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
142013	-	Fig. 3	B30C-1125-595-GY	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
142012	-	Fig. 3	B30C-2250-595-GY	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
142011	✂	Fig. 3	B30C-4000-595-GY	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
142022	-	Fig. 3	B30C-500-595-PL	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142021	-	Fig. 3	B30C-1125-595-PL	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142020	-	Fig. 3	B30C-2250-595-PL	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142019	✂	Fig. 3	B30C-4000-595-PL	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
142002	-	Fig. 3	B30C-500-595-CL	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
142001	-	Fig. 3	B30C-1125-595-CL	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
142000	-	Fig. 3	B30C-2250-595-CL	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
141999	✂	Fig. 3	B30C-4000-595-CL	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending.

## Low-Halide Multi-Purpose Polyester (B-569)

- Low-halide content for labelling stainless steel pipes and surfaces.
- Adheres best to very smooth surfaces and ideal for mounting to rigid panels




Figure 3



Part #	For XY-Cutter	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
117989	-	Fig. 3	B30C-500-569-WT	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
117988	-	Fig. 3	B30C-1125-569-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117987	-	Fig. 3	B30C-2250-569-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117986	-	Fig. 3	B30C-3000-569-WT	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
117985	✂	Fig. 3	B30C-4000-569-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117993	-	Fig. 3	B30C-500-569-YL	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
117992	-	Fig. 3	B30C-1125-569-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117991	-	Fig. 3	B30C-2250-569-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117990	✂	Fig. 3	B30C-4000-569-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117976	-	Fig. 3	B30C-500-569-RD	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117975	-	Fig. 3	B30C-1125-569-RD	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117974	-	Fig. 3	B30C-2250-569-RD	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117973	✂	Fig. 3	B30C-4000-569-RD	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117936	-	Fig. 3	B30C-500-569-BL	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117935	-	Fig. 3	B30C-1125-569-BL	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117934	-	Fig. 3	B30C-2250-569-BL	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117933	✂	Fig. 3	B30C-4000-569-BL	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117956	-	Fig. 3	B30C-500-569-LB	Light Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
117955	-	Fig. 3	B30C-1125-569-LB	Light Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117954	-	Fig. 3	B30C-2250-569-LB	Light Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117953	✂	Fig. 3	B30C-4000-569-LB	Light Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117980	-	Fig. 3	B30C-500-569-SB	Sky Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
117979	-	Fig. 3	B30C-1125-569-SB	Sky Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117978	-	Fig. 3	B30C-2250-569-SB	Sky Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117977	✂	Fig. 3	B30C-4000-569-SB	Sky Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117948	-	Fig. 3	B30C-500-569-GN	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117947	-	Fig. 3	B30C-1125-569-GN	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117946	-	Fig. 3	B30C-2250-569-GN	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117945	✂	Fig. 3	B30C-4000-569-GN	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117964	-	Fig. 3	B30C-500-569-OR	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
117963	-	Fig. 3	B30C-1125-569-OR	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117962	-	Fig. 3	B30C-2250-569-OR	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117961	✂	Fig. 3	B30C-4000-569-OR	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117932	-	Fig. 3	B30C-500-569-BK	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117931	-	Fig. 3	B30C-1125-569-BK	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117930	-	Fig. 3	B30C-2250-569-BK	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117929	✂	Fig. 3	B30C-4000-569-BK	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117940	-	Fig. 3	B30C-500-569-BR	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117939	-	Fig. 3	B30C-1125-569-BR	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117938	-	Fig. 3	B30C-2250-569-BR	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117937	✂	Fig. 3	B30C-4000-569-BR	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117960	-	Fig. 3	B30C-500-569-OC	Ochre	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
117959	-	Fig. 3	B30C-1125-569-OC	Ochre	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117958	-	Fig. 3	B30C-2250-569-OC	Ochre	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117957	✂	Fig. 3	B30C-4000-569-OC	Ochre	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117984	-	Fig. 3	B30C-500-569-TN	Tan	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
117983	-	Fig. 3	B30C-1125-569-TN	Tan	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117982	-	Fig. 3	B30C-2250-569-TN	Tan	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117981	✂	Fig. 3	B30C-4000-569-TN	Tan	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117952	-	Fig. 3	B30C-500-569-GY	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
117951	-	Fig. 3	B30C-1125-569-GY	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117950	-	Fig. 3	B30C-2250-569-GY	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117949	✂	Fig. 3	B30C-4000-569-GY	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117972	-	Fig. 3	B30C-500-569-PL	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117971	-	Fig. 3	B30C-1125-569-PL	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117970	-	Fig. 3	B30C-2250-569-PL	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117969	✂	Fig. 3	B30C-4000-569-PL	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
117968	-	Fig. 3	B30C-500-569-PK	Pink	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
117967	-	Fig. 3	B30C-1125-569-PK	Pink	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117966	-	Fig. 3	B30C-2250-569-PK	Pink	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117965	✂	Fig. 3	B30C-4000-569-PK	Pink	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117944	-	Fig. 3	B30C-500-569-CL	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
117943	-	Fig. 3	B30C-1125-569-CL	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117942	-	Fig. 3	B30C-2250-569-CL	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117941	✂	Fig. 3	B30C-4000-569-CL	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

## Pre-Printed Pre-Cut Blank Sign Headers

### (B-595)

- Allows printer to create multicolour signs fast in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME / ANSI Z535 standards
- Indoor / outdoor grade material conforms to rough, highly textured and difficult-to-adhere-to surfaces




Figure 70a



Part #	Diagram	Catalog #	B#	Material	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
142191	Fig. 70a	B30-241-595-OSHADA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
142190	Fig. 70a	B30-25-595-OSHADA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
142193	Fig. 70a	B30-241-595-OSHACA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
142192	Fig. 70a	B30-25-595-OSHACA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
142185	Fig. 70a	B30-241-595-ANSICA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
142184	Fig. 70a	B30-25-595-ANSICA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
142183	Fig. 70a	B30-241-595-ANSIDA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
142182	Fig. 70a	B30-25-595-ANSIDA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
142187	Fig. 70a	B30-241-595-ANSIWA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
142186	Fig. 70a	B30-25-595-ANSIWA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
142189	Fig. 70a	B30-241-595-ANSINO	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
142188	Fig. 70a	B30-25-595-ANSINO	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
139956	Fig. 70a	B30-25-595-PREC	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
139954	Fig. 70a	B30-25-595-PEL	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
142196	Fig. 70a	B30-242-595-BLNKWT	B-595	Vinyl		1.125 (28.6)	2.750 (69.9)	1	300	B30-R10000
142195	Fig. 70a	B30-241-595-BLNKWT	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
142197	Fig. 70a	B30-219-595-BLNKWT	B-595	Vinyl		2.250 (57.5)	3.750 (95.3)	1	250	B30-R10000
142194	Fig. 70a	B30-25-595-BLNKWT	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
142199	Fig. 70a	B30-241-595-BLNKYL	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
142198	Fig. 70a	B30-25-595-BLNKYL	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000



## Pre-Printed GHS / CLP Chemical Labels

### (B-569, B-7569)

- Blank labels with pre-printed red diamonds allow the printer to produce 2-colour GHS / CLP labels in one print pass
- Three sizes of labels, each with six diamond layouts that match templates in the printer app (if applicable) or in the Brady Workstation GHS App
- Indoor / outdoor vinyl material and durable inks withstand exposure to moisture, chemicals and handling



Part #	Catalog #	B#	Material	Legend		Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon	
121633	B30-260-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000	
121639	B30-261-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000	
121645	B30-262-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000	
121634	B30-260-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000	
121640	B30-261-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000	
121646	B30-262-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000	
121635	B30-260-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000	
121641	B30-261-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000	
121647	B30-262-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000	
121636	B30-260-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000	
121642	B30-261-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000	
121648	B30-262-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000	
121637	B30-260-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000	
121643	B30-261-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000	
121649	B30-262-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000	
149503	B30-260-569-CLP4B	B-569	Polyester		L4B Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000	
121638	B30-260-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000	
149504	B30-261-569-CLP4B	B-569	Polyester		L4B Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000	
121644	B30-261-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000	
149505	B30-262-569-CLP4B	B-569	Polyester		L4B Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000	
121650	B30-262-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000	
149209	B30-18-7569-CLP4C	B-7569	Vinyl			L4C Diamond + Text	1.000 (25.4)	3.000 (76.2)	1	1000	B30-R10000

### ▶ Easily create your GHS labels with Brady Workstation GHS App

- Use built-in pre-formatted label layouts with approved GHS symbols
- Search the built-in chemical database by CAS number to auto-populate your label, then edit to meet your specific SDS
- Print any of the six template sizes
- No driver required when using the BradyPrinter S3700



## Pre-Printed Right-To-Know Chemical Labels

### (B-595)

- Produce 5-colour chemical labels in a single print pass
- Indoor / outdoor grade material withstands exposure to moisture, chemicals and handling

Service temp: -40 to 180° F (-40 to 82.2° C)  
 Application temp: 0 to 180° F (-17.78 to 82.2° C)  
 Average outdoor durability: 8-10 years  
 Agency approvals: **RoHS**




Part #	Catalog #	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Roll	Rec. Ribbon
142041	B30-244-595-NFPA		2.250 (57.5)	2.250 (57.5)	365	B30-R10000
142044	B30-245-595-NFPA		2.250 (57.5)	4.000 (101.6)	240	B30-R10000
142037	B30-263-595-NFPA		4.000 (101.6)	6.250 (158.8)	170	B30-R10000
142042	B30-244-595-DIAM		2.250 (57.5)	2.250 (57.5)	365	B30-R10000
142038	B30-161-595-DIAM		4.000 (101.6)	4.000 (101.6)	240	B30-R10000
142047	B30-246-595-NFR		1.125 (28.6)	3.000 (76.2)	300	B30-R10000
142040	B30-244-595-CB		2.250 (57.5)	2.250 (57.5)	365	B30-R10000
142043	B30-245-595-CB		2.250 (57.5)	4.000 (101.6)	240	B30-R10000
142039	B30-263-595-CB		4.000 (101.6)	6.250 (158.8)	170	B30-R10000
142045	B30-244-595-HMIG		2.250 (57.5)	2.250 (57.5)	365	B30-R10000
142046	B30-246-595-HMIG		1.125 (28.6)	3.000 (76.2)	300	B30-R10000

## Paper Labels

### (B-424)

- Economical matte labels for light-duty general identification
- Excellent contrast and smear resistance for barcode printing

Service temp: -40 to 124° F (-40 to 51.1° C)  
 Agency approvals: **RoHS**



Part #	For XY-Cutter	Catalog #	Colour	Label Width A Inch (mm)	Label Height B Feet (m)	Labels Per Roll	Rec. Ribbon
145298	✂	B30C-4000-424	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R4300

# Heavy Duty Polyester Tags

(B-551, B-851)

- Non-adhesive polyester tag provides superior durability and outdoor performance over paper tags
- All tags are user-printable on front side only – pre-printed reverse side text options available
- Tags comply with OSHA 1910.145(f) when printed with required signal word and major message, and exceed 50lb (22.68kg) pull test for lockout application
- Blank tags are ideal for general industrial and colour coding applications
- Tags are pre-cut with large diameter mounting hole and are micro-perforated between tags to separate cleanly
- Snap-in plastic grommets available to add extra strength around mounting hole (catalog #20596, 100 per bag)




Figure 3b




Figure 69a  
Printable Front Side




Figure 69b  
Printable Front Side







Figure 69c  
Printable Front Side



Pre-Printed  
Reverse Side B



Pre-Printed  
Reverse Side F



Blank  
Reverse Side

Part #	Diagram	Catalog #	Colour	B#	Printable Front Side	Non-Printable Reverse Side Text	Tag Width A Inch (mm)	Tag Length B Inch (mm)	Tags Per Roll	Rec. Ribbon
176251	69c	B30-255-851OSHADSB	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176252	69a	B30-255-851-ANSIDB	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176253	69a	B30-255-851-OSHADB	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176255	69b	B30-255-851-WHT-B	White	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176256	69c	B30-255-851OSHADSF	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176257	69a	B30-255-851-ANSIDF	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176258	69a	B30-255-851-OSHADF	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176260	69b	B30-255-851-WHT-F	White	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176261	69c	B30-255-851-OST-BK	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176267	69a	B30-255-851-ANSIDA	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176268	69a	B30-255-851-OSHADA	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176269	69a	B30-255-851-ANSICA	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176270	69b	B30-255-851-WT	White	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176264	69b	B30-255-851-RD	Red	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176262	69b	B30-255-851-YL	Yellow	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176263	69b	B30-255-851-GN	Green	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176266	69b	B30-255-851-BL	Blue	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
176265	69b	B30-255-851-OR	Orange	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
118013	3b	B30C-2500-551-WT	White	B-551			2.500 (63.5)	50 ft. (15.2m)	1 roll (cont.)	B30-R10000
118012	3b	B30C-3250-551-WT	White	B-551			3.250 (82.6)	50 ft. (15.2m)	1 roll (cont.)	B30-R10000
118011	3b	B30C-4250-551-WT	White	B-551			4.250 (107.9)	50 ft. (15.2m)	1 roll (cont.)	B30-R10000



## General Identification Die Cut Labels for Bins, Shelves, Tools and Production Areas (B-595)

- These labels are all highly conforming to irregular, angled or rough surfaces frequently found in industrial production line areas
- Die-cut labels are an ideal choice when pre-cut labels are preferred or consistent label sizing is required
- B-595 is a convenient cut-to-length continuous material that reduces the need to stock multiple parts when inconsistent label lengths are expected




Figure 3a





Part #	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Label Height B Feet (m)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
142031	Fig. 3a	B30C-500-595-WT	White	0.500 (12.7)	100 ft. (30.5 m)	0.700 (17.8)	1 roll (cont.)	B30-R10000
142030	Fig. 3a	B30C-1125-595-WT	White	1.125 (28.6)	100 ft. (30.5 m)	1.375 (34.9)	1 roll (cont.)	B30-R10000
142036	Fig. 3a	B30C-500-595-YL	Yellow	0.500 (12.7)	100 ft. (30.5 m)	0.700 (17.8)	1 roll (cont.)	B30-R10000
142035	Fig. 3a	B30C-1125-595-YL	Yellow	1.125 (28.6)	100 ft. (30.5 m)	1.375 (34.9)	1 roll (cont.)	B30-R10000

## General Identification for Laboratory Storage, Equipment and Safety Labels

### (B-595, B-7569)

- Super strong adhesives and colours ideal for marking laboratory equipment, containers, hoses and lab storage cabinets, shelves and drawers
- GHS labels available for marking chemicals in the lab and shipment boxes when collaborating with other labs
- Pre-printed sign header labels make your safety and housekeeping reminders stand out and stay put!



Part #	Diagram	Catalog #	Colour /Legend	Label Width A Inch (mm)	Label Height B Inch (mm)	Roll Length B Feet (m)	Labels Per Row	Labels Per Roll	Rec. Ribbon
<b>Indoor/Outdoor Vinyl (B-595):</b>									
142031	Fig. 3a	B30C-500-595-WT	White	0.500 (12.7)	–	100 (30.5)	–	1 roll (cont.)	B30-R10000
142030	Fig. 3a	B30C-1125-595-WT	White	1.125 (28.6)	–	100 (30.5)	–	1 roll (cont.)	B30-R10000
142036	Fig. 3a	B30C-500-595-YL	Yellow	0.500 (12.7)	–	100 (30.5)	–	1 roll (cont.)	B30-R10000
142035	Fig. 3a	B30C-1125-595-YL	Yellow	1.125 (28.6)	–	100 (30.5)	–	1 roll (cont.)	B30-R10000
142026	Fig. 3a	B30C-500-595-RD	Red	0.500 (12.7)	–	100 (30.5)	–	1 roll (cont.)	B30-R10000-WT
142025	Fig. 3a	B30C-1125-595-RD	Red	1.125 (28.6)	–	100 (30.5)	–	1 roll (cont.)	B30-R10000-WT
141994	Fig. 3a	B30C-500-595-BL	Blue	0.500 (12.7)	–	100 (30.5)	–	1 roll (cont.)	B30-R10000-WT
141993	Fig. 3a	B30C-1125-595-BL	Blue	1.125 (28.6)	–	100 (30.5)	–	1 roll (cont.)	B30-R10000-WT
142010	Fig. 3a	B30C-500-595-GN	Green	0.500 (12.7)	–	100 (30.5)	–	1 roll (cont.)	B30-R10000-WT
142009	Fig. 3a	B30C-1125-595-GN	Green	1.125 (28.6)	–	100 (30.5)	–	1 roll (cont.)	B30-R10000-WT
<b>Pre-Printed Pre-Cut Blank Sign Headers (B-595):</b>									
142183	Fig. 70	B30-241-595-ANSIDA		2.250 (57.5)	3.000 (76.2)	–	1	300	B30-R10000
142182	Fig. 70	B30-25-595-ANSIDA		4.000 (101.6)	6.000 (152.4)	–	1	175	B30-R10000
142189	Fig. 70	B30-241-595-ANSINO		2.250 (57.5)	3.000 (76.2)	–	1	300	B30-R10000
142188	Fig. 70	B30-25-595-ANSINO		4.000 (101.6)	6.000 (152.4)	–	1	175	B30-R10000
<b>Pre-Printed GHS/CLP Chemical (B-7569):</b>									
121638	L4B Diamond + Text	B30-260-7569-CLP4B		2.170 (55.0)	3.350 (85.1)	–	1	340	B30-R10000
121644	L4C Diamond + Text	B30-261-7569-CLP4B		2.950 (75.0)	4.330 (110.0)	–	1	270	B30-R10000
149209	L4C Diamond + Text	B30-18-7569-CLP4C		1.000 (25.4)	3.000 (76.2)	–	1	1000	B30-R10000

(B-595) U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending.

## Repositionable Multi-Purpose Vinyl

### (B-581)

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable facility labels, such as Lean / 5S inventory labels




Figure 3



Part #	For XY-Cutter	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
118006	-	Fig. 3	B30C-500-581-WT	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
118005	-	Fig. 3	B30C-1125-581-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
118004	-	Fig. 3	B30C-2250-581-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
118003	✂	Fig. 3	B30C-4000-581-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
118010	-	Fig. 3	B30C-500-581-YL	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
118009	-	Fig. 3	B30C-1125-581-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
118008	-	Fig. 3	B30C-2250-581-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
118007	✂	Fig. 3	B30C-4000-581-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

## Printable Magnetic Labels

### (B-509)

- Easiest and quickest material for removing and repositioning
- Non-adhesive magnetic material that can be printed on directly
- Ideal for changing shelf storage locations, and reusable/repositionable Lean / 5S applications




Figure 3b



Part #	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
117917	Fig. 3b	B30C-2500-509-WT	White	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
117916	Fig. 3b	B30C-4250-509-WT	White	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000
117919	Fig. 3b	B30C-2500-509-YL	Yellow	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
117918	Fig. 3b	B30C-4250-509-YL	Yellow	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000



## ToughStripe® Printable Floor Marking Tape (B-483A with overlamine)

- Revolutionary B-483A material has ultra-aggressive adhesive
- Withstands forklift and pallet jack traffic without tearing or lifting
- Each roll ships with a roll of clear overlamine which must be applied over printed label and onto appropriate surface for best performance




Figure 3b



Part #	For XY-Cutter	Diagram	Catalog #	B#	Colour	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
139950	-	Fig. 3b	B30C-1125-483WT-KT	B-483	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
139949	-	Fig. 3b	B30C-2250-483WT-KT	B-483	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
139948	-	Fig. 3b	B30C-3000-483WT-KT	B-483	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
139947	✂	Fig. 3b	B30C-4000-483WT-KT	B-483	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
139946	-	Fig. 3b	B30C-1125-483YL-KT	B-483	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
139945	-	Fig. 3b	B30C-2250-483YL-KT	B-483	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
139944	-	Fig. 3b	B30C-3000-483YL-KT	B-483	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
139943	✂	Fig. 3b	B30C-4000-483YL-KT	B-483	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
139942	-	Fig. 3b	B30C-1125-483RD-KT	B-483	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139941	-	Fig. 3b	B30C-2250-483RD-KT	B-483	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139940	✂	Fig. 3b	B30C-4000-483RD-KT	B-483	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139939	-	Fig. 3b	B30C-1125-483BL-KT	B-483	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139938	-	Fig. 3b	B30C-2250-483BL-KT	B-483	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139937	✂	Fig. 3b	B30C-4000-483BL-KT	B-483	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139936	-	Fig. 3b	B30C-1125-483GN-KT	B-483	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139935	-	Fig. 3b	B30C-2250-483GN-KT	B-483	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139934	✂	Fig. 3b	B30C-4000-483GN-KT	B-483	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139933	-	Fig. 3b	B30C-1125-483BK-KT	B-483	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139932	-	Fig. 3b	B30C-2250-483BK-KT	B-483	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139931	✂	Fig. 3b	B30C-4000-483BK-KT	B-483	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
139930	-	Fig. 3b	B30C-1125-483OR-KT	B-483	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
139929	-	Fig. 3b	B30C-2250-483OR-KT	B-483	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
139928	✂	Fig. 3b	B30C-4000-483OR-KT	B-483	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000

## Retro Reflective All-Weather Labels

### (B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labelling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions




Figure 3



Part #	For XY-Cutter	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
117999	-	Fig. 3	B30C-1125-584-SL	Silver	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
117998	-	Fig. 3	B30C-2250-584-SL	Silver	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
117997	✂	Fig. 3	B30C-4000-584-SL	Silver	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
118002	-	Fig. 3	B30C-1125-584-YL	Yellow	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
118001	-	Fig. 3	B30C-2250-584-YL	Yellow	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
118000	✂	Fig. 3	B30C-4000-584-YL	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
117996	-	Fig. 3	B30C-1125-584-OR	Orange	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
117995	-	Fig. 3	B30C-2250-584-OR	Orange	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
117994	✂	Fig. 3	B30C-4000-584-OR	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

## BradyGlo™ High-Intensity Glow-in-the-Dark Labels

### (B-526)

- For glow-in-the-dark identification up to 10 hours
- Designed for directional, evacuation and equipment marking. Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26




Figure 3



Part #	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
117928	Fig. 3	B30C-1125-526	Luminous Green	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
117926	Fig. 3	B30C-2250-526	Luminous Green	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
117924	Fig. 3	B30C-4000-526	Luminous Green	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

## ToughWash® Washdown Resistant Labels

### (B-854, B-855)

- Withstands high pressure, heat, harsh chemicals and numerous washdown cycles
- Legible and long-lasting for even the toughest washdown cycles
- Ideal for use in the food and beverage industry
- B-854 offers metal detectable layer to allow detection in food stream




Diagram	Catalog #	B#	Colour/ Header	Label Width A Inch (mm)	Length B Inch (mm)	Labels Per Roll	Rec. Ribbon	
<b>ToughWash Metal Detectable Material (B-854):</b>								
133119	Fig. 3	B30C-4000-854-YL	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
133120	Fig. 3	B30C-4000-854-WT	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
139804	Fig. 73	B30-25-854-OSHADA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
133123	Fig. 73	B30-25-854-ANSIWA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
133124	Fig. 73	B30-25-854-ANSIDA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
133125	Fig. 73	B30-25-854-ANSICA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
<b>ToughWash Material (B-855):</b>								
133146	Fig. 3	B30C-1125-855-YL	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
133142	Fig. 3	B30C-2250-855-YL	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
133144	Fig. 3	B30C-4000-855-YL	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
133147	Fig. 3	B30C-1125-855-WT	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
133143	Fig. 3	B30C-2250-855-WT	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
133145	Fig. 3	B30C-4000-855-WT	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
139803	Fig. 73	B30-25-855-OSHADA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
133148	Fig. 73	B30-25-855-ANSIWA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
133149	Fig. 73	B30-25-855-ANSIDA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
133150	Fig. 73	B30-25-855-ANSICA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000

## Cold Temperature Application Labels

### (B-549)

- Special adhesive permanently adheres to extremely cold surfaces
- Can be applied in -10° F and lasts in -40° F
- Ideal for cold storage warehouses, coolers, freezers and short-term winter outdoor use




Figure 3



Part #	For XY-Cutter	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
117862	-	Fig. 3	B30C-1125-549-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117861	-	Fig. 3	B30C-2250-549-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117860	✂	Fig. 3	B30C-4000-549-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117865	-	Fig. 3	B30C-1125-549-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
117864	-	Fig. 3	B30C-2250-549-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
117863	✂	Fig. 3	B30C-4000-549-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

## Raised Profile Labels - Engraved Plate Substitutes - Push Button Style

### (B-593)

- Costs up to 80% less than engraved legend plates
- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates
- 10-year outdoor durability rating
- 5 push button sizes (including keyed and non-keyed 22.5 mm and 30.5 mm hole dia. keyed)

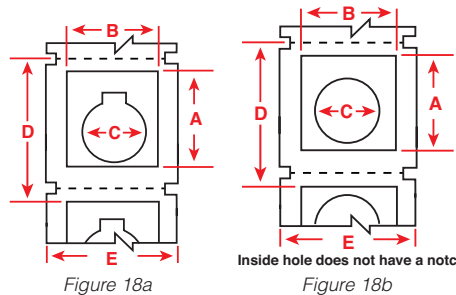


Figure 18a

Figure 18b



Part #	Diagram	Catalog #	Colour	Label Height A Inch (mm)	Label Width B Inch (mm)	Hole Dia. C Inch (mm)	Vert. repeat D Inch (mm)	Web width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
118051	Fig. 18a	B30EP-167-593-WT	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
118056	Fig. 18b	B30EP-167U-593-WT	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
118066	Fig. 18a	B30EP-169-593-WT	White	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R6000
118061	Fig. 18a	B30EP-168-593-WT	White	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R6000
118071	Fig. 18a	B30EP-170-593-WT	White	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R6000
118053	Fig. 18a	B30EP-167-593-YL	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
118058	Fig. 18b	B30EP-167U-593-YL	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
118068	Fig. 18a	B30EP-169-593-YL	Yellow	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R6000
118063	Fig. 18a	B30EP-168-593-YL	Yellow	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R6000
118073	Fig. 18a	B30EP-170-593-YL	Yellow	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R6000
118055	Fig. 18a	B30EP-167-593-BK	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
118060	Fig. 18b	B30EP-167U-593-BK	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
118070	Fig. 18a	B30EP-169-593-BK	Black	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
118065	Fig. 18a	B30EP-168-593-BK	Black	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
118075	Fig. 18a	B30EP-170-593-BK	Black	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT
118054	Fig. 18a	B30EP-167-593-GN	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
118059	Fig. 18b	B30EP-167U-593-GN	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
118069	Fig. 18a	B30EP-169-593-GN	Green	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
118064	Fig. 18a	B30EP-168-593-GN	Green	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
118074	Fig. 18a	B30EP-170-593-GN	Green	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT
118052	Fig. 18a	B30EP-167-593-RD	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
118057	Fig. 18b	B30EP-167U-593-RD	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
118067	Fig. 18a	B30EP-169-593-RD	Red	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
118062	Fig. 18a	B30EP-168-593-RD	Red	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
118072	Fig. 18a	B30EP-170-593-RD	Red	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT



## Raised Profile Labels – Engraved Plate Substitutes – Rectangular Style (B-593)

- Costs up to 80% less than engraved legend plates
- High-gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- Ideal for front-of-panel identification as well as inside-panel backer board labels and component identification
- Costs up to 80% less than engraved plates and prints out in about 4 seconds
- 10-year outdoor durability rating






Figure 18c



Part #	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Label Height B Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
118015	Fig. 18c	B30EP-171-593-WT	White	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
118021	Fig. 18c	B30EP-172-593-WT	White	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
118039	Fig. 18c	B30EP-175-593-WT	White	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R6000
118027	Fig. 18c	B30EP-173-593-WT	White	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
118033	Fig. 18c	B30EP-174-593-WT	White	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000
118043	Fig. 18c	B30EP-176-593-WT	White	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R6000
118047	Fig. 18c	B30EP-177-593-WT	White	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R6000
118017	Fig. 18c	B30EP-171-593-YL	Yellow	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
118023	Fig. 18c	B30EP-172-593-YL	Yellow	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
118040	Fig. 18c	B30EP-175-593-YL	Yellow	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R6000
118029	Fig. 18c	B30EP-173-593-YL	Yellow	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
118035	Fig. 18c	B30EP-174-593-YL	Yellow	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000
118044	Fig. 18c	B30EP-176-593-YL	Yellow	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R6000
118048	Fig. 18c	B30EP-177-593-YL	Yellow	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R6000
118020	Fig. 18c	B30EP-171-593-BK	Black	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
118026	Fig. 18c	B30EP-172-593-BK	Black	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
118042	Fig. 18c	B30EP-175-593-BK	Black	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R4400-WT
118032	Fig. 18c	B30EP-173-593-BK	Black	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
118038	Fig. 18c	B30EP-174-593-BK	Black	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
118046	Fig. 18c	B30EP-176-593-BK	Black	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R4400-WT
118050	Fig. 18c	B30EP-177-593-BK	Black	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R4400-WT
118018	Fig. 18c	B30EP-171-593-GN	Green	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
118024	Fig. 18c	B30EP-172-593-GN	Green	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
118041	Fig. 18c	B30EP-175-593-GN	Green	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R4400-WT
118030	Fig. 18c	B30EP-173-593-GN	Green	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
118036	Fig. 18c	B30EP-174-593-GN	Green	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
118045	Fig. 18c	B30EP-176-593-GN	Green	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R4400-WT
118049	Fig. 18c	B30EP-177-593-GN	Green	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R4400-WT
118016	Fig. 18c	B30EP-171-593-RD	Red	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
118022	Fig. 18c	B30EP-172-593-RD	Red	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
118028	Fig. 18c	B30EP-173-593-RD	Red	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
118034	Fig. 18c	B30EP-174-593-RD	Red	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
118019	Fig. 18c	B30EP-171-593-SL	Silver	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
118025	Fig. 18c	B30EP-172-593-SL	Silver	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
118031	Fig. 18c	B30EP-173-593-SL	Silver	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
118037	Fig. 18c	B30EP-174-593-SL	Silver	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000

## Product Identification Materials

- A variety of polyester and specialty materials in wide 4-in. (101.6mm) format rolls designed for shape cutting multiple labels out of a single continuous roll
- Ideal for smaller volume custom product and general identification labels
- Proven materials with agency approvals for product identification and asset tracking applications



<b>B-424:</b> Paper	Matte bright white	Service temp: -40 to 124° F (-40 to 51.1° C)	RoHS
<b>B-423:</b> Polyester with standard adhesive	Gloss white	Service temp: -94 to 248° F (-70 to 120° C)	UL RoHS
<b>B-428:</b> Metallised polyester with standard adhesive for smooth surfaces	Matte silver	Service temp: -40 to 293° F (-40 to 145° C)	UL RoHS
<b>B-432:</b> Polyester with stronger adhesive	Clear	Service temp: -40 to 212° F (-40 to 100° C)	UL RoHS
<b>B-434:</b> Metallised polyester with stronger adhesive for textured surfaces	Gloss silver	Service temp: -40 to 194° F (-40 to 90° C)	UL RoHS
<b>B-437:</b> *Tedlar® for high-temp labelling and cable wraps	Matte white	Service temp: -94 to 275° F (-70 to 135° C)	RoHS
<b>B-480:</b> Non-metal polyester with rubber-based adhesive for oily / greasy surfaces	Satin light gray	Service temp: -94 to 248° F (-70 to 120° C)	UL RoHS
<b>B-483:</b> Polyester with ultra-aggressive adhesive for rough surfaces	Gloss white	Service temp: -94 to 248° F (-70 to 120° C)	UL RoHS
<b>B-484:</b> Polyester with ultra-aggressive adhesive and pliability for angular surfaces	Gloss white	Service temp: -40 to 240° F (-40 to 115.6° C)	UL RoHS
<b>B-489:</b> Polyester with ultra-aggressive adhesive for rough surfaces	Matte white	Service temp: -94 to 248° F (-70 to 120° C)	UL RoHS
<b>B-488:</b> Polyester with standard adhesive and chemical resistance	Matte white	Service temp: -40 to 320° F (-40 to 160° C)	RoHS
<b>B-486:</b> Metallised polyester with ultra-aggressive adhesive for rougher surfaces	Matte silver	Service temp: -40 to 248° F (-40 to 120° C)	UL RoHS
<b>B-498:</b> Vinyl cloth	Semi-gloss white	Service temp: -40 to 175° F (-40 to 79.4° C)	UL RoHS
<b>B-565:</b> Metallised polyester with standard adhesive	Matte silver	Service temp: -40 to 240° F (-40 to 115.6° C)	RoHS
<b>B-595:</b> Indoor / outdoor vinyl	Semi-gloss white	Service temp: -40 to 180° F (-40 to 82.2° C)	RoHS
<b>B-724:</b> Polyimide label for extremely high temperatures	Matte amber	Service temp: -94 to 518° F (-70 to 270° C)	RoHS
<b>B-727:</b> Polyimide label for standard temperatures	Gloss white	Service temp: -94 to 212° F (-70 to 100° C)	UL RoHS
<b>B-787:</b> Polyvinylflouride tape	Gloss white	Service temp: -94 to 212° F (-70 to 100° C)	RoHS

Part #	For XY-Cutter	Catalog #	B#	Colour	Label width A Inch (mm)	Roll length B feet (m)	Labels per roll	Rec. ribbon
143578	✂	B30C-4000-423	B-423	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R6000
145298	✂	B30C-4000-424	B-424	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R4300
145292	✂	B30C-4000-432	B-432	Clear	4.000 (101.6)	120 (36.6)	1 roll (cont.)	B30-R6000
143579	✂	B30C-4000-437	B-437	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R4300
143580	✂	B30C-4000-483	B-483	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R6000
145295	✂	B30C-4000-484	B-484	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R6000
143584	✂	B30C-4000-488	B-488	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
143581	✂	B30C-4000-489	B-489	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
142027	✂	B30C-4000-595-WT	B-595	White	4.000 (101.6)	100 (30.4)	1 roll (cont.)	B30-R10000
145297	✂	B30C-4000-727	B-727	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R6000
149181	✂	B30C-4000-498	B-498	White	4.000 (101.6)	80 (24.4)	1 roll (cont.)	B30-R6200
143582	✂	B30C-4000-787	B-787	White	4.000 (101.6)	60 (18.3)	1 roll (cont.)	B30-R6000
145296	✂	B30C-4000-724	B-724	Amber	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
148780	✂	B30C-4000-480	B-480	Light Gray	4.000 (101.6)	115 (35.1)	1 roll (cont.)	B30-R6000
145300	✂	B30C-4000-428	B-428	Silver	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
145293	✂	B30C-4000-434	B-434	Silver	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R6000
145294	✂	B30C-4000-486	B-486	Silver	4.000 (101.6)	115 (35.1)	1 roll (cont.)	B30-R4300
117920	✂	B30C-4000-565-SL	B-565	Silver	4.000 (101.6)	100 (30.4)	1 roll (cont.)	B30-R10000

\*Tedlar is a registered trademark of E.I. DuPont De Nemours and Company

## Tamper-Evident Asset ID Labels

### (B-438)

- Leaves checkerboard footprint on surface and on label if removed to prevent re-use




Figure 5




Figure 6




Part #	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon
118076	Fig. 5	B30-17-438	Matte Silver	2.000 (50.8)	1.000 (25.4)	1225	B30-R4300
118077	Fig. 5	B30-18-438	Matte Silver	3.000 (76.2)	1.000 (25.4)	1225	B30-R4300
118078	Fig. 5	B30-222-438	Matte Silver	3.000 (76.2)	2.000 (50.8)	650	B30-R4300
118014	Fig. 6	B30C-3000-438-SL	Matte Silver	3.000 (76.2)	100 ft. (30.5 m)	1 roll (cont.)	B30-R4300

## Metallised Polyester Labels

### (B-565)

- For product labelling, asset tracking and general industrial identification
- Ideal for serial number plates and rating plates with name-plate quality and metal-looking finish



Part #	Catalog #	Colour	Label Width A Inch (mm)	Label Height B Feet (m)	Labels Per Roll	Rec. Ribbon
117922	B30C-1125-565-SL	Matte Silver	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4300
117921	B30C-2250-565-SL	Matte Silver	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4300

## Standard Adhesion Polyester Labels

### (B-423)

- For general purpose identification, product labels and post-process circuit board identification
- Adheres best to flat, smooth surfaces. Consult technical data sheet for UL / CSA ratings and complete performance and testing details




Figure 3a




Part #	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Label Height B Feet (m)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
152999	Fig. 3a	B30C-2000-423	Gloss White	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R6000
153000	Fig. 3a	B30C-3000-423	Gloss White	3.000 (76.2)	100 ft. (30.5 m)	3.250 (82.6)	1 roll (cont.)	B30-R6000

## Standard Adhesion Metallised Polyester Labels

### (B-428)

- For labelling applications where a metal label or metal appearance is required
- Ideal for rating plates and product labels
- Adheres best to flat, smooth surfaces
- Consult technical data sheet for UL / CSA ratings and complete performance and testing details




Part #	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Label Height B Feet (m)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
153394	Fig. 3a	B30C-2000-428	Matte Lt. Gray	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R4300

## High Adhesion Metallised Polyester Labels

### (B-434A)

- Ideal for rating plates and product labels
- Adheres best to flat and smooth or textured surfaces or when extra adhesion is required
- Consult technical data sheet for UL / CSA ratings and complete performance and testing details



Part #	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Label Height B Feet (m)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
<b>High gloss silver metallised polyester with high adhesion for textured surfaces (B-434A)</b>								
153363	Fig. 3a	B30C-2000-434	Gloss Silver	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R6000
153364	Fig. 3a	B30C-3000-434	Gloss Silver	3.000 (76.2)	100 ft. (30.5 m)	3.250 (82.6)	1 roll (cont.)	B30-R6000



## Ultra Aggressive Adhesive High Temp and Chemical Resistant Polyester Labels

### (B-443)

- For labelling applications where chemical-resistance, self-extinguishing and short-term high-temp properties are required
- Superior resistance to chemicals and fluids that do not have a high pH value
- Excellent long-term temperature resistance and very high short-term temperature resistance to 410°F (210°C)
- Best for flat and smooth or textured surfaces
- Consult technical data sheet for complete testing and performance details




Figure 3a



Part #	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Label Height B Feet (m)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
153277	Fig. 3a	B30C-2000-443	Matte White	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R6400
153278	Fig. 3a	B30C-3000-443	Matte White	3.000 (76.2)	100 ft. (30.5 m)	3.250 (82.6)	1 roll (cont.)	B30-R6400
153279	Fig. 3a	B30C-4000-443	Matte White	4.000 (101.6)	100 ft. (30.5 m)	4.250 (107.6)	1 roll (cont.)	B30-R6400

## Paper Labels

### (B-424)

- Economical choice for light duty part labelling, box labels and general identification
- Bright white finish with excellent image contrast and smear resistance for barcode printing




Figure 3a



Part #	Diagram	Catalog #	Colour	Label Width A Inch (mm)	Label Height B Feet (m)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
153295	Fig. 3a	B30C-3000-424	White	3.000 (76.2)	150 ft. (45.8m)	3.250 (82.6)	1 roll (cont.)	B30-R4300

# Printer specifications

<b>Description</b>	Facility, safety and Lean / 5S printer for walk-up-and-print ease of use, fast supply changeovers, multicolour printing and ability to cut out text and shapes. Best choice for "lean event" labelling situations and multiple user locations because it has a very approachable interface and very fast supply changeovers.		
<b>Applications</b>	Facility and safety ID, signs, pipe markers, Lean / 5S, arc flash labels, GHS and chemical labels, equipment labels, hazard communication identification, inventory and inspection labelling, temporary labelling, warehouse marking, panel and push-button labels, reflective and glow-in-the-dark labels, tags, magnetic, cold-temp labelling. Cut out text and shapes.		
<b>Printer catalog number</b>	S3700		
<b>Label material types</b>	Extremely aggressive 8 to 10 year outdoor vinyl with high tack and chemical resistance, plus ToughStripe® floor tape, wash-down material, 10-hr glow in the dark, reflective, magnetic, tags, engraved plate substitute and 30 other materials.		
<b>Includes</b>	Printer, power cord, USB cable, cleaning kit, quick start guide, BradyWorkstation software		
<b>Warranty</b>	5 year		
<b>Features</b>			
<b>Print resolution</b>	300 dpi	<b>Cutter type</b>	Auto cutter. XY cutter.
<b>Colour printing capability</b>	Multi-colour	<b>Media sensor adjustment</b>	Not Required
<b>Maximum print speed</b>	5 in. (127mm) / sec		
<b>Interface</b>			
<b>Display type</b>	Colour touchscreen	<b>Supply remaining gauge</b>	Yes
<b>Display size</b>	3.42 in x 6.11 in (86.8 x 155.2 mm)	<b>Languages</b>	English, Spanish, Portuguese, French
<b>Keyboard type</b>	Full size QWERTY	<b>Units</b>	Inches, millimeters, points
<b>Stand-alone apps and editing</b>			
<b>Built-in label wizards</b>	Custom label GHS / CLP Safety signs Pipe marker Arc flash	Circle gauge Gradient scale Right-to-know WHMIS Tags	General templates Quick label PreMade
<b>Fonts, graphics, symbols</b>			
<b>Font sizes</b>	4 pt (minimum)	<b>Symbols categories</b>	Arrows, Fire Safety, First Aid/Rescue, Hazardous Transport, Hazmat GHS / CLP, Hazmat HSID, Imported Graphics, ISO Graphics, Mandatory
<b>Font styles</b>	Arial, Arial 65, Courier New, Tahoma, Times New Roman, MS Gothic, Trechuchet MS, Verdana plus more with Brady Workstation. TrueType fonts storable to printer	<b>Barcode symbologies — linear</b>	Code 39 Code 128 Auto Interleaved 2 of 5 EAN-13 UPC-A More through Brady WorkStation
<b>Symbols quantity</b>	664	<b>Barcode symbologies — 2D</b>	QR Code PDF417
<b>Media / supplies information</b>			
<b>Compatible media</b>	B30 Series	<b>Ribbon and label installation</b>	<b>Media:</b> Supplied in cartridge, drops into place, 20 sec changeover <b>Ribbon:</b> Supplied in cartridge, snaps into place, 20 sec changeover
<b>Compatible ribbons</b>	R10000	<b>Custom media parts available</b>	No
<b>Die-cuts vs continuous</b>	Continuous tapes, pre-printed die-cut labels, general die-cut labels	<b>Media widths</b>	0.5 to 4 in (12.7 to 101.6 mm)
<b>Software and connectivity</b>			
<b>Connectivity options</b>	Stand-alone use, Ethernet, USB, Mobile device connected, PC connectable (optional)		
<b>Software compatibility</b>	Brady Workstation		
<b>Physical / operational characteristics</b>			
<b>Dimensions</b>	11 in. H x 19 in. W x 14.25 in. D (279.4 H x 482.6 W x 361.9 D mm)	<b>Operating humidity range</b>	15% to 80% RH Non-Condensing
<b>Weight</b>	36.9 lbs. (16.7 kg)	<b>Storage humidity range</b>	15% to 90% RH Non-Condensing
<b>Operating temperature range</b>	50° to 104°F (10 to 40°C)	<b>Power supply voltage</b>	110V - 240V
<b>Storage temperature range</b>	-4° to 122°F (-20 to 50°C)	<b>Auto shutoff / Power conserve</b>	Yes
<b>Agency approvals / regulatory compliance</b>			
<b>Enables industry compliance</b>	USA and Canada - cULc Europe - CE (including Eu RoHS) Argentina - UL-AR and S Mark Mexico - UL NOM CoC	Australia - RCM mark Russia - EAC Korea - KC China - CCC and RoHS India - BIS Taiwan - BSMI Exemption South Africa - LOA and SABS (No logo on product label)	
<b>U.S. patents</b>	Multiple U.S. Patents Apply Printers: 6364552 B1; 6788324; 6768502 B2 BBP37 Printer only: 6664995 B2; Ribbon cartridges: 6860658 B2; D480749		



We make products that make the world a safer and smarter place. From the depths of the ocean to outer space, from the factory floor to the delivery room — **we're just about everywhere you look.**

- ▶ For more information or to learn more about our innovative products, visit [BradyID.com.au](https://BradyID.com.au) or call 1800 620 816.

Australia  
Customer Service: 1800 620 816  
[BradyID.com.au](https://BradyID.com.au)