

samaritan[®] PAD 500P




Public Access Defibrillator with Integrated CPR Advisor™



Key Link in the Chain of Survival

Cardiopulmonary Resuscitation (CPR) and Automated External Defibrillators (AEDs) are key links in the chain of survival of sudden cardiac arrest (SCA). Some cardiac events are treatable with effective CPR alone. Others require a combination of effective CPR and the delivery of a lifesaving shock by an AED. Either way, every minute counts. Typically, only about five percent of SCA victims survive. However, survival rates can increase up to 74%¹ if CPR and a shock from an AED are provided within three minutes of collapse. Reducing response time by even one or two minutes from collapse to shock can mean the difference between death and survival.²

More than a simple AED, the HeartSine® samaritan® PAD 500P with integrated CPR Advisor™ meets the needs of two key links in the chain of survival. Not only can the SAM 500P deliver a lifesaving shock, it provides real-time visual and verbal feedback to the rescuer on the force and rate of CPR compressions during an SCA resuscitation – effectively assisting the rescuer to perform CPR.

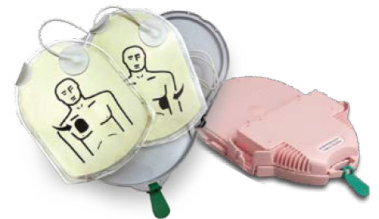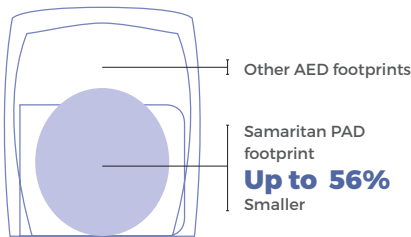

Real-Time CPR Feedback

ICG-BASED FEEDBACK. Easy-to-understand visual and voice prompts guide the rescuer through the entire resuscitation process, including CPR—a key link in the chain of survival.

EASY-TO-FOLLOW VISUAL AND VERBAL GUIDES. Designed for ease of use, the samaritan PAD 500P uses easy-to-understand visual and voice prompts to guide the rescuer through the entire CPR process, providing specific feedback on the force and rate of compressions.

Ready to Shock

HIGHEST LEVEL OF PROTECTION FROM DUST AND WATER. With its IP56 rating, the samaritan PAD 500P defibrillator offers unmatched ruggedness.

CLINICALLY VALIDATED TECHNOLOGY.³ The samaritan PAD 500P utilises proprietary electrode technology and SCOPE™ biphasic technology, an escalating, low-energy waveform that automatically adjusts for differences in patient impedance.

MOST COMPACT DESIGN. At 1.1 kg and with a compact footprint, the samaritan PAD is the most portable AED among top-selling brands.

Simple to Own

TWO PARTS, ONE EXPIRATION DATE. The innovative Pad-Pak™, an integrated battery and electrode single-use cartridge with one expiration date, offers one simple maintenance change every four years.

LOW COST OF OWNERSHIP. With a shelf life of four years from date of manufacture, the Pad-Pak offers significant savings over other defibrillators that require separate battery and pad units.

PAD-PAK AND PEDIATRIC-PAK WITH PRE-ATTACHED ELECTRODES.

The HeartSine samaritan PAD's built-in intelligence and unique Paediatric-Pak ensure the appropriate energy level is delivered for children, between 1 and 8 years of age or up to 25 kg.

CPR Advisor is deactivated when the Paediatric-Pak is in use.





| Physical | With Pad-Pak™ Inserted |
|----------|--------------------------|
| Size: | 20 cm x 18.4 cm x 4.8 cm |
| Weight: | 1.1 kg |

| Defibrillator | |
|---------------|--|
| Waveform: | Self-Compensating Output Pulse Envelope (SCOPE™) Optimised biphasic escalating waveform compensates energy, slope and duration for patient impedance |

| Patient Analysis System | |
|--------------------------|--|
| Method: | Evaluates patient's ECG, signal quality, electrode contact integrity and patient impedance to determine if defibrillation is require |
| Sensitivity/Specificity: | Meets IEC/EN 60601-2-4 |
| Impedance Range: | 20 - 230 ohms |

| Environmental | |
|--------------------------------|---|
| Operating/Standby Temperature: | 0°C to 50°C |
| Transportation Temperature: | -10°C to 50°C for up to two days. If the device has been stored below 0°C, it should be returned to an ambient temperature of between 0°C to 50°C for at least 24 hours before use. |
| Relative Humidity: | 5% to 95% (non-condensing) |
| Enclosure: | IEC/EN 60529 IP56 |
| Altitude: | 0 to 4,575 metres |
| Shock: | MIL STD 810F Method 516.5, Procedure 1 (40 G's) |
| Vibration: | MIL STD 810F Method 514.5+, Procedure 1 Category 4 Truck Transportation - US Highways Category 7 Aircraft - Jet 737 & General Aviation |
| EMC: | IEC/EN 60601-1-2 |
| Radiated Emissions: | IEC/EN 55011 |
| Electrostatic Discharge | IEC/EN 61000-4-2 (8 kV) |
| RF Immunity: | IEC/EN 61000-4-3 80 MHz-2.5 GHz, (10 V/m) |
| Magnetic Field Immunity: | IEC/EN 61000-4-8 (3 A/m) |
| Aircraft: | RTCA/DO-160G, Section 21 (Category M) RTCA/DO-227 (ETSO-C142a) |
| Falling Height: | 1 meter |

| Energy Selection | |
|------------------|---|
| Pad-Pak: | Shock 1: 150J; Shock 2: 150J; Shock 3: 200J |
| Paediatric-Pak: | Shock 1: 50J; Shock 2: 50J; Shock 3: 50J |

| Charging Time | |
|---------------|---|
| New Battery: | Typically 150J in < 8 seconds, 200J in < 12 seconds |

| Event Documentation | |
|------------------------|--|
| Type: | Internal Memory |
| Memory Capacity: | 90 minutes of ECG (full disclosure) and event/incident recording |
| Playback Capabilities: | Custom USB data cable (optional) directly connected to PC with Saver EVO™ Windows-based data review software |

| Materials Used | |
|----------------|--|
| Housing: | ABS, Santoprene |
| Electrodes: | Hydrogel, Silver, Aluminum and Polyester |

| Pad-Pak – Electrode and Battery Cartridge Adult Pad-Pak (Pad-Pak-03) and Paediatric Pad-Pak (Pad-Pak-04) *ETSO-certified aviation Pad-Pak also available | |
|--|--|
| Shelf Life: | See the expiration date on the Pad-Pak/Paediatric-Pak (4 years from manufacture date) |
| Weight: | 0.2 kg |
| Size: | 10 cm x 13.3 cm x 2.4 cm |
| Battery Type: | Disposable single-use combined battery and defibrillation electrode cartridge (lithium manganese dioxide (LiMnO2) 18V) |
| Battery Capacity (New): | > 60 shocks at 200J or 6 hours of continuous monitoring |
| Electrodes: | HeartSine samaritan disposable defibrillation pads are supplied as standard with each device |
| Electrode Placement: | Anterior-lateral (Adult); Anterior-posterior or Anterior-lateral (Paediatric) |
| Electrode Active Area: | 100 cm ² |
| Electrode Cable Length: | 1 metre |
| Aircraft Safety Test (ETSO-certified Pad-Pak): | RTCA/DO-227 (ETSO-C142a) |

1. Walsh SJ, McClelland A, Owens CG, Allen J, McCanderson J, Turner C, Adgey J. Efficacy of Distinct Energy Delivery Protocols Comparing Two Biphasic Defibrillators for Cardiac Arrest. Am J Cardiol 2004;94:378-380.
2. Warning: The SAM 360P is a fully automatic defibrillator. When required, it will deliver a shock to the patient WITHOUT user intervention.

